

COMPACT 019 RACK



Features

- Aluminum Front Panel IP65
- Front accessible USB connector
- Rear side OSD
- VGA/DVI Input
- 9~36V wide range power input

System

- VGA 1
- DVI 1
- Touch screen USB
- Others USB Front Panel
- OSD Control 5 keys at rear
- Power 3 pin Terminal Block Connector

Display

- Display type TFT 19" LED 4:3
- Resolution 1280 x 1024 SXGA
- Max. color 16.2M
- Luminance (cd/m) 350
- View angle 85/85/85/85° LRUD
- Contrast 1000:1

Touch Screen

- Type Resistive Touch optional
- Interface USB

Power

- Power Input 9~36V DC
- Power Consumption Max 44W

Mechanical



- Construction Aluminum Front Panel
- IP Rating IP65 Front Panel
- Mounting Panel Mounting
- Dimensions 483x355x61.8 mm
- Net weight 7 Kg

Environment

- Operating Temperature 0~50°C
- Storage Temperature -20~60°C
- Certification CE/FCC class A

Ordering Information

- HS 895 Compact LCD 019 RACK

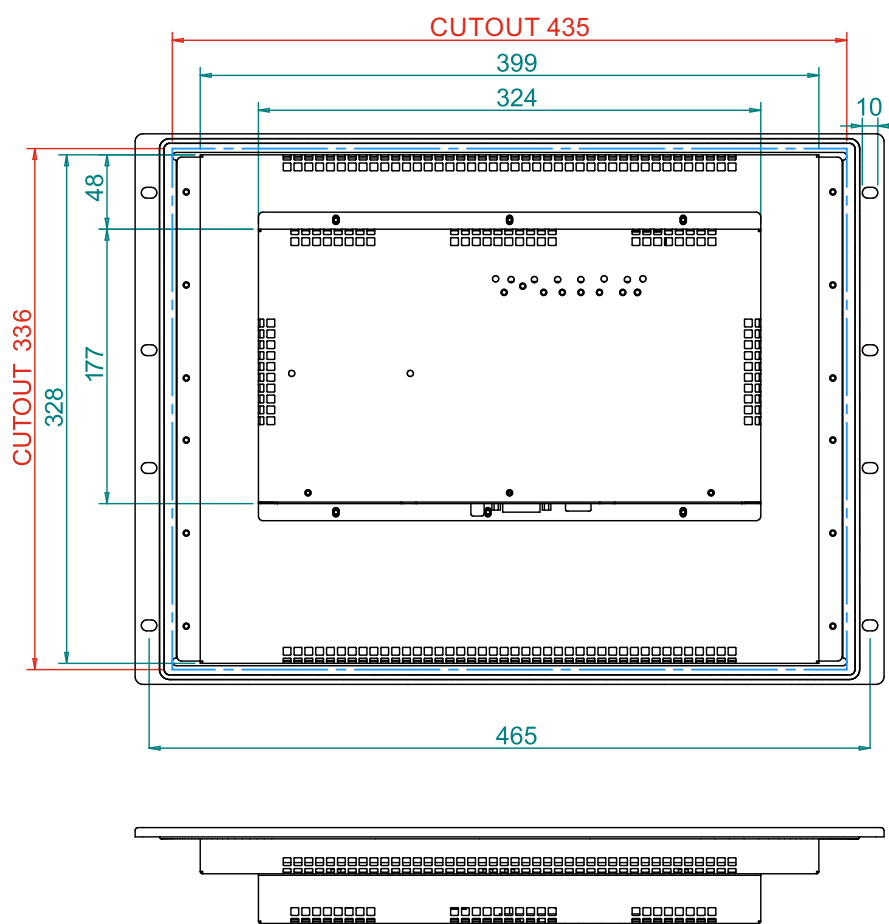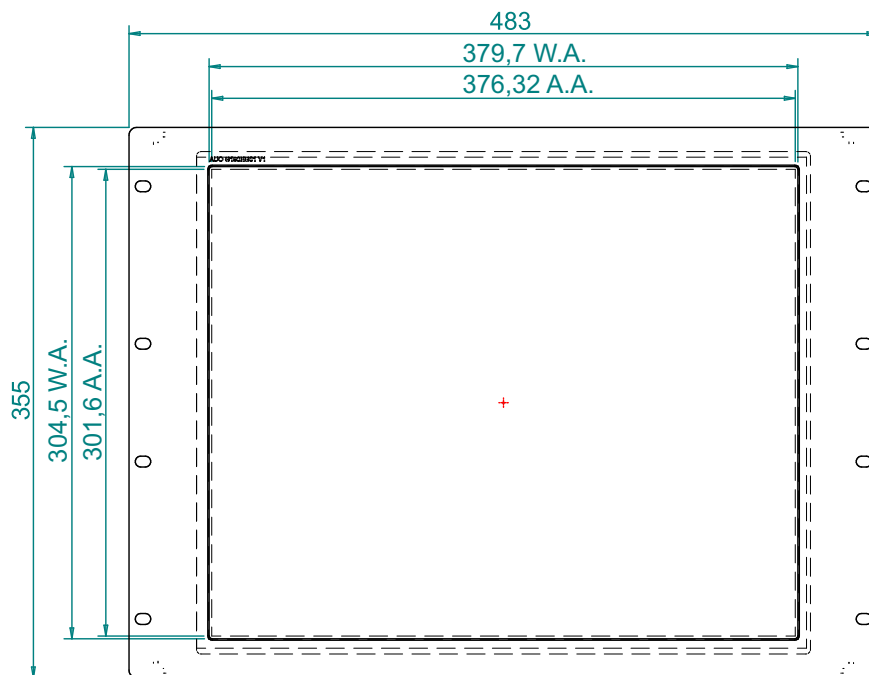

unit: mm

